

PRODUCT DATA SHEET

- NO ODOR
- AGGRESSIVE ADHESIVE
- FAST & EASY APPLICATION
- IDEAL FOR BUILT UP, METAL & SINGLE PLY ROOFS
- GREAT FOR SEALING, PATCHING & EMERGENCY REPAIRS

DESCRIPTION:

Roof X Tender™ Fleece Back Premium Repair Tape with Shur-Stik Adhesive Technology is an aggressive self-adhesive repair and flashing tape for use in a variety of applications. It will adhere to metal, wood, structural concrete, concrete block, brick, smooth BUR, smooth SBS, smooth APP and most single ply membranes. Manufactured with select thermoplastic elastomers, Roof X Tender Shur-Stik Tape provides a tough and durable repair. It is ideal for patching and repairing splits and cracks, flashings, skylights, penetrations and other repairs. It's pressure sensitive properties allow a fast, clean and easy application.

PREPARATION:

Substrate should be clean, dry and free of dew, frost, oil, salt, dust and rust. Clean area first with a cloth and cleaner. On metal roofs power wash and scrub with detergent to remove any oil or grime. Use a wire brush to remove rust. Use a wire brush to remove loose granules on SBS & APP mod-bit sheets. Seal edges of the tape with approved acrylic sealant or patch to stop migration of water between the granules and the tape. Use RX-99 primer on rough surfaces or in cold temperature conditions, (-30°F to 40°F).

APPLICATION:

In cold climates, preheat roll in a warm room and warm the substrate with hot air. In extreme cold weather keep the rolls warm to aid adhesion. In hot weather (80°F+) keep rolls in a cooler and/or shade to aid in application. Cut to length. Shorter lengths (less than 4 ft) are easier to work with unless using a team of two or more applicators. Remove release film. Press in place using a gloved hand, steel or rubber roller. Apply the exact length to predetermined location. Tape cannot be peeled up and reset. Always roll from the center out to remove trapped air pockets and fishmouths. Start in corners to eliminate "tenting". Coat tape same day with either RX-500, RX-700 acrylic coating or RX-900 or RX-905 SB coating. Apply RX-900 or RX-905 at a rate of 1 gal/sq. Over application with solvent based coatings may cause blistering, delamination or blistering. Apply saturation coat at 1.5 gallons per square extending coating a minimum of 2" past tape on all sides. Once dry, apply two coats of Roof X Tender coating over entire roof surface, including tape. Selection of Roof X Tender coating will depend on type of existing roof and your desired life expectancy of coating. Always follow application instructions and coverage rates on product labels. Repair Tape must be re-coated using Roof X Tender coating at the end of the warranty period of the coating applied. When applying in temperatures between -30 °F and 40 °F, apply RX-99 primer prior to installation of tape.

PRECAUTIONS:

RXT Fleece Back Repair Tape will not adhere to silicone surfaces. For best results, test adhesion on membranes before applying. Do NOT store at temperatures above 110 °F. Do NOT stretch tape during installation. Do NOT use where acidic or alkaline chemicals are present (for example: lab fume hoods, vents, etc).

WARRANTY & DISCLAIMER:

For limited warranty and disclaimer information visit:
www.rooftxender.com/warranty.html

www.tribuiltmaterialsgroup.com
 1.800.516.1485

RXT FLEECE BACK

PREMIUM SELF-ADHESIVE REPAIR & FLASHING TAPE

MADE WITH
SHUR-STIK
 PERMANENT ADHESIVE

TECHNICAL DATA:



- Peel Strength**
21 lbs. +/-in width
- Application Temperature**
-30 °F to 200 °F
- Color**
Polyester Fleece
- Elongation**
750%
- Low Temperature Flexibility**
Passes at -65 °F, no cracking
- Permeability**
.001 perms max

- Shelf Life**
5 years*
- Tensile Break**
800+/-50 psi
- Total Thickness**
35 mils
- UV Resistance**
Must be coated with RX-500 or RX-700

*Storage at ambient room temperatures

SHIPPING:

4" X 50' ROLLS	6" X 50' ROLLS	12" X 50' ROLLS
12 per case	8 per case	4 per case

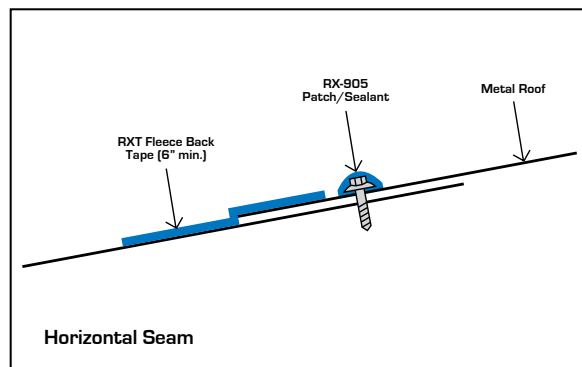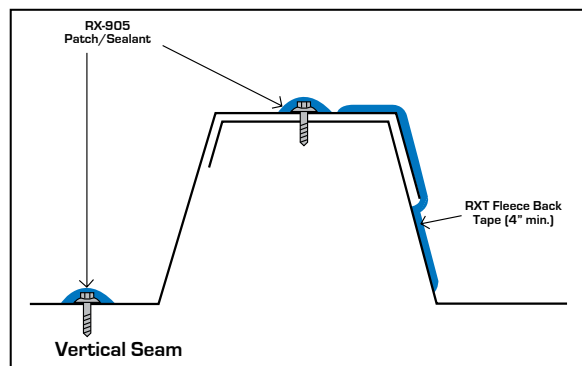

Distributed exclusively by Allied Building Products
www.alliedbuilding.com